

## MUB/T 062 500D4 IE2

Item no. 34560

### Description

- Up to 120°C medium temperature, continuous operation
- Multi-functional use, e.g. for kitchen exhaust air
- Modular system
- Pre-assembled isolator is standard
- Low sound level
- Easy to maintain and reliable
- High efficient IE2 motors
- Speed-controllable via frequency converter
- Motor outside the air stream



All MUB/T fans have impellers with backward curved blades, manufactured from aluminium, and IEC standard motors outside the air stream with efficiency class IE2 for all 400V three phase motors from 0.75 kW. The MUB/T fans are suitable for medium temperatures up to 120°C continuously. Motor protection by cold conductors or thermal contact, to be connected to an external motor protection device. The casing consists of an aluminium frame with fibreglass reinforced plastic corners and double skin, galvanised steel panels with a 20 mm mineral wool insulation. Panels are removable, allowing flexible ventilation solutions - the air direction can easily be changed. With quick lock access door. The MUB bottom panel is shaped as a grease tray and incorporates a pre-mounted 1" drain plug. An isolator switch is mounted on the casing. Several filter modules like f.e. activated carbon- or aluminum filters are available, calculated individually on the working point.

**Please note: Speed control by voltage, i.e. voltage transformers, is not possible!**

In accordance with Commission Regulation (EC) no 640/2009 of the European Parliament - eco-design requirements for electric motors - the new international efficiency classes are binding as of 16 June 2011. These guidelines defined by CEMEP and EPACT are regarded as international standard for energy-saving high-efficiency motors for frequencies of 50 or 60 Hz and make the use of IE2 motors mandatory. With this new and more efficient technology we offer our customers many advantages such as environmentally friendly operation, reduced energy consumption and hence lower emissions. IE2 motors have a higher efficiency even in part load operation and allow optimum adjustment to the operating point. In addition, the IE2 motors generate less noise and develop less heat, which has a positive influence on the efficiency and the cooling requirement of the motor. Please note: IE2 motors cannot be speed controlled by voltage, i.e. voltage transformers.

### Technical parameters



Nominal data		
Voltage	400	V
Frequency	50	Hz
Phase	3	~
Input power (P1)	1487	W
Current	3,26	A
Max. airflow	8708	m³/h
Fan impeller speed	1469	r.p.m.
Weight	85	kg
Temperature data		
Max. temperature of transported air	120	°C
Sound data		
Sound pressure level at 3 m (20m² Sabin)	57	dB(A)

Protection / Classification	
Insulation class	F
Enclosure class, motor	IP55
Default group	
Starting current	23 A

## EPS diagrams

### Performance


#### Diagrams

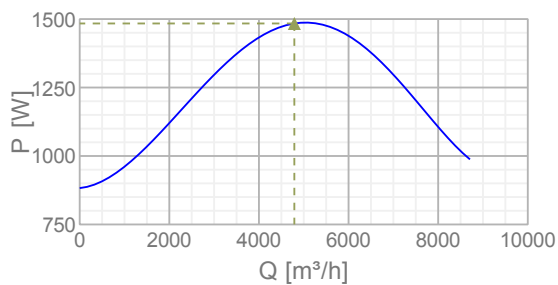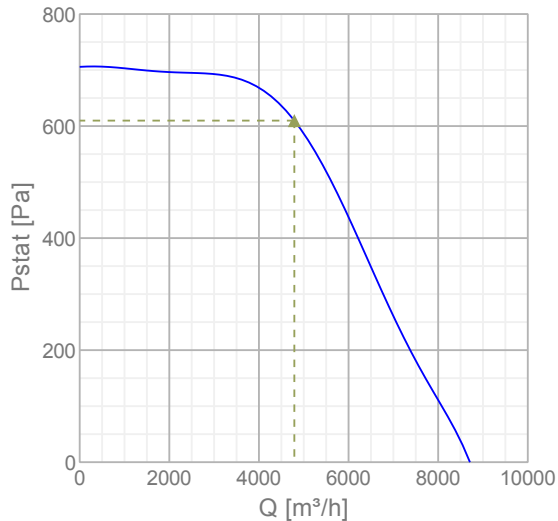

#### Max efficiency

Hydraulic data	
▲ Working air flow	4790 m <sup>3</sup> /h
▲ Working static pressure	610 Pa
▲ Power	1484 W
Speed	1470 r.p.m.
Current	3,25 A
SFP	1,12 kW/(m <sup>3</sup> /s)
Voltage	400 V


## Dimensions

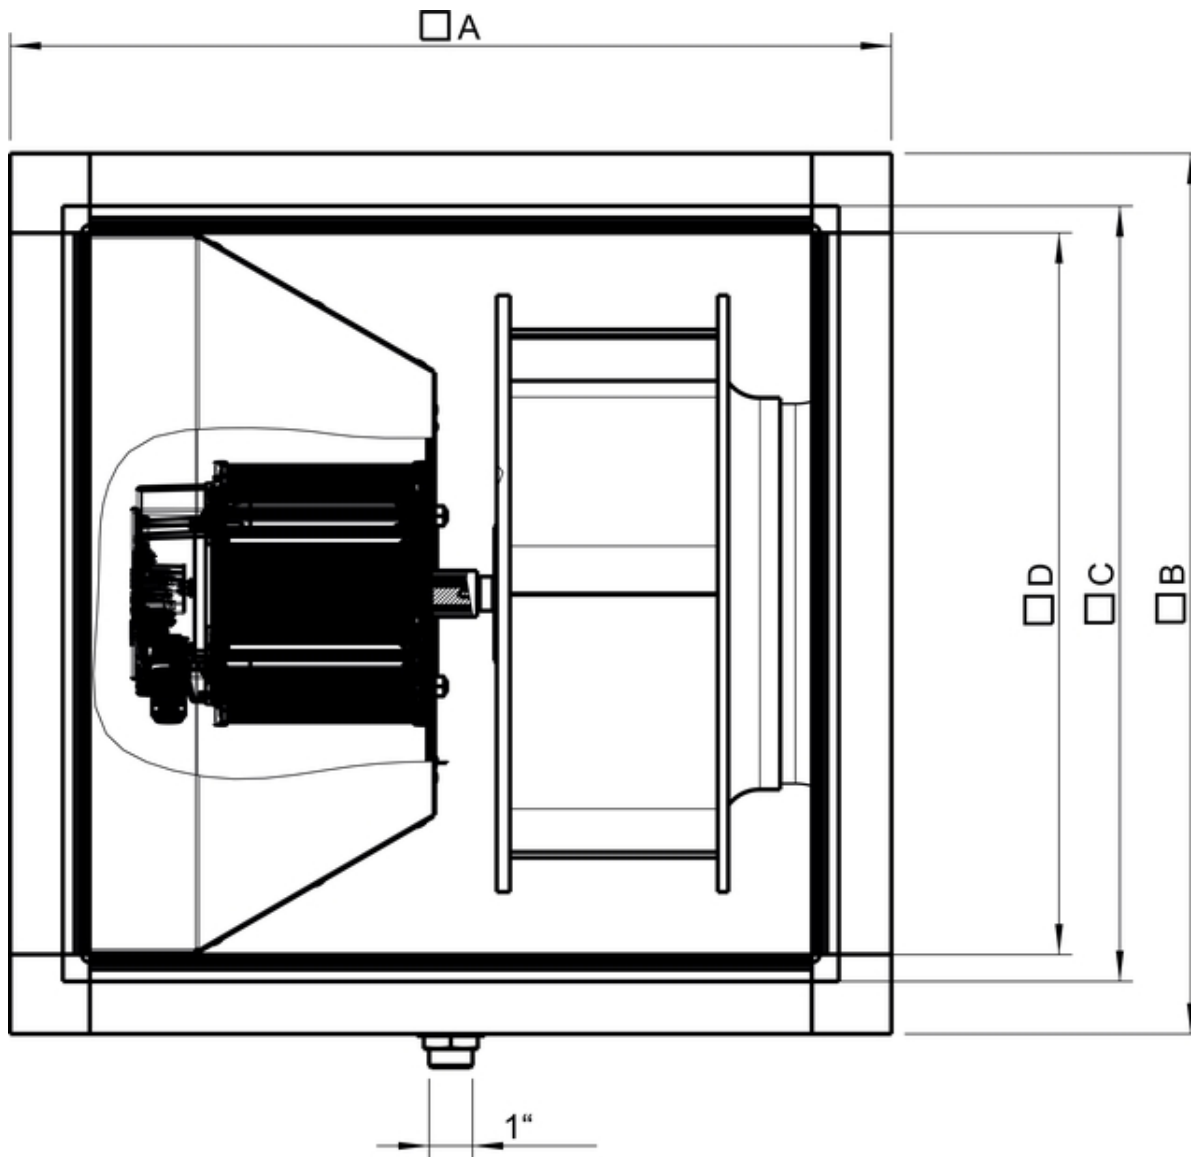

$\square$ A	$\square$ B	$\square$ C	$\square$ D
MUB/T 062 500	800	800	720 678

## Wiring

### Dreiphasenmotor mit Kaltleiter Three phase motor with cold conductor Moteur triphasé avec résistance PTC

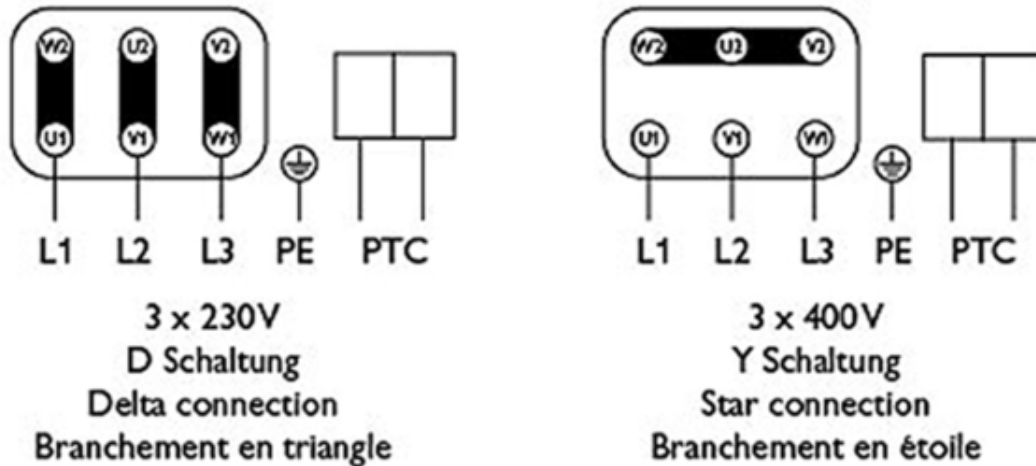

Drehrichtungsänderung durch Vertauschen von 2 Phasen  
Changing of direction of rotation by interchanging of two phases  
Changement de sens de rotation par inversion de deux phases

Typenschild beachten! See label! Voir plaquette!

## Accessories


### Electric accessories


- [U-EK230E Motor protection \(30199\)](#)
- [FXDM5AM Frequency inv. IP54 \(31387\)](#)
- [FRQ-4A V2 \(36227\)](#)
- [FRQ5-4A+LED V2 \(36229\)](#)
- [FRQ5S-4A+LED V2 \(36233\)](#)
- [FRQS-4A V2 \(36231\)](#)


### Accessories

- [FGV 062/716-716 flex. conn. \(4198\)](#)
- [UGS 062/630 adapter flex. \(4358\)](#)
- [SDM Service Door MUB 062 comp. \(32573\)](#)
- [CCM outlet MUB062 d630 \(311681\)](#)
- [CCM outlet MUB062 d560 \(311684\)](#)
- [CCM inlet MUB062 d560 \(311782\)](#)
- [CCM inlet MUB062 d630 \(311783\)](#)
- [M-SG 062/718x718 \(301346\)](#)
- [WSG 062 MUB/T complete \(36067\)](#)
- [SD-MUB Vibration pad set \(37324\)](#)
- [CCMI outlet 062 d560 insul KIT \(313847\)](#)
- [CCMI outlet 062 d630 insul KIT \(313848\)](#)
- [FGV 062/716-716 flex. 120°C \(38362\)](#)
- [UGS 062/500 adapter flex 120°C \(38370\)](#)
- [UGS 062/630 adapter flex 120°C \(38371\)](#)

## Documentation

 [manual\\_mub\\_all\\_en\\_\[008\].pdf \(2,29MB\)](#)

 eu declaration of conformity\_thermofans\_en\_[002].pdf (46,39kB)

 Commissioning Report\_fans\_160628\_en\_001.pdf (42,79kB)

## Acoustics

Mid-frequency band, Hz

	Hz	Tot	63	125	250	500	1k	2k	4k	8k
LwA Inlet	dB(A)	75	62	64	68	70	69	66	61	54
LwA Outlet	dB(A)	77	64	66	70	72	71	68	63	56
LwA Surrounding	dB(A)	60	47	49	53	55	54	51	46	39

Measuring point:  $q_v = 1,33 \text{ m}^3/\text{s}$ ,  $P_s = 610 \text{ Pa}$